


PROSOCO R-GUARD™ Air & Moisture Barrier Reinforcement at Rough Openings

Detail No.: 20.24

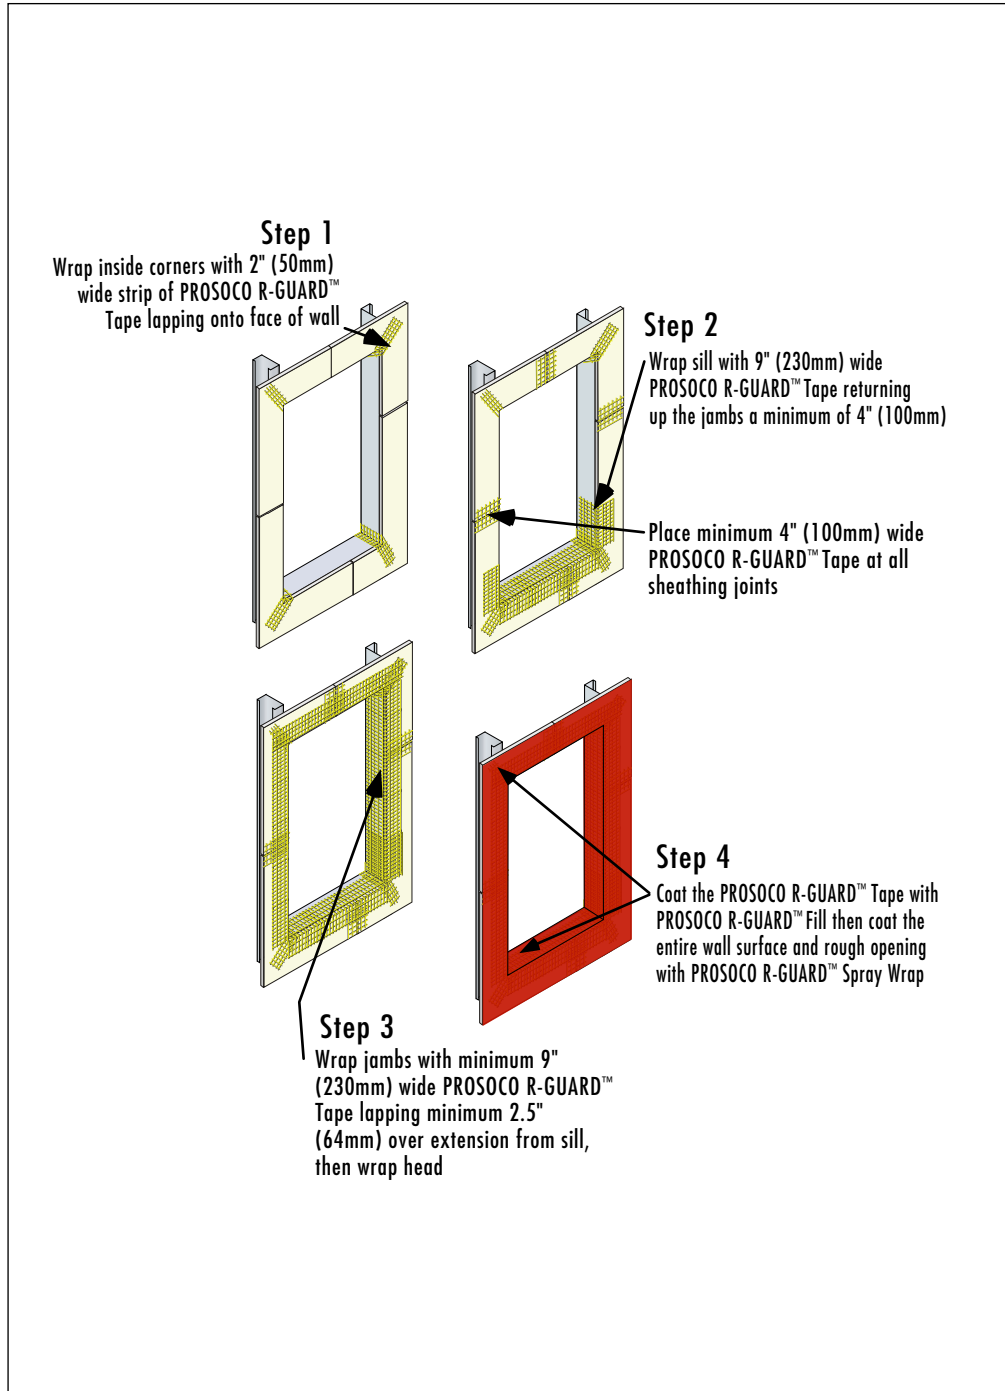

Notes:

- 1] Prepare opening prior to the installation of the window or mechanical equipment.
- 2] Incorporate flashing as illustrated in 10.23 (a, b, c and d) or as per other details where flashing is shown.
- 3] The complete installation of window or mechanical equipment should include an airtight seal between the object and the PROSOCO R-GUARD™ protection inboard of the outer sealant joint.